

EXPOLINC PANEL GUIDE 2013



LOVE
YOUR
BRAND

**Cut
the
crap!**





CONTENT

ROLL UP CLASSIC 3

ROLL UP PROFESSIONAL 3

ROLL UP COMPACT 3

4 SCREEN CLASSIC..... 3

POLE SYSTEM..... 3

POP UP MAGNETIC 4-5

POP UP MAGNETIC TOWER..... 4-5

SOFT IMAGE 6

SOFT IMAGE COUNTER 6

CASE & COUNTER 7

PLASTIC BOX III 7

STAND UP 8

PANEL BASE..... 9

MAGNET FRAME 9

FLAG SYSTEM..... 10

BROCHURE STAND 11

BROCHURE STAND DOUBLE 11

4 BROCHURE..... 11

GRAPHIC PROFILE 11

ROLL UP

Product	Qty panels	Panel size		Visible size		Weight**	
		mm	inch	mm	inch	Kg	lbs
Classic 700	1 pc	700 x 2200	27 ^{1/2} " x 86 ^{5/8} "	700 x 1950	27 ^{1/2} " x 76 ^{3/4} "	4,5	9,9
Classic 850	1 pc	850 x 2400	33 ^{7/16} " x 94 ^{1/2} "	850 x 2150	33 ^{7/16} " x 84 ^{5/8} "	5,2	11,5
Classic 1000	1 pc	1000 x 2400	39 ^{3/8} " x 94 ^{1/2} "	1000 x 2150	39 ^{3/8} " x 84 ^{5/8} "	5,8	12,8
Classic 1150	1 pc	1150 x 2400	45 ^{1/4} " x 94 ^{1/2} "	1150 x 2150	45 ^{1/4} " x 84 ^{5/8} "	6,1	13,4
Classic 1450	1 pc	1450 x 2400	57 ^{3/32} " x 94 ^{1/2} "	1450 x 2150	57 ^{3/32} " x 84 ^{5/8} "	8,5	18,7
Professional 850	1 pc	850 x 2400	33 ^{7/16} " x 94 ^{1/2} "	850 x 2150	33 ^{7/16} " x 84 ^{5/8} "	5,5	12,1
Professional Double	2 pcs	850 x 2400	33 ^{7/16} " x 94 ^{1/2} "	850 x 2150	33 ^{7/16} " x 84 ^{5/8} "	7,8	17,2

When using 2450 mm supporting rod add 300 mm (11^{3/4}") to the panel size.

Maximum panel thickness is 440 micron. When using 2450 mm supporting rod or stiff material, the recommended thickness is 270-330 micron. When uncertain we recommend to make own tests with different materials.

Product	Qty panels	Panel size		Visible size (variable height)*		Weight**	
		mm	inch	mm	inch	Kg	lbs
Compact 850	1 pc	850 x 2420	33 ^{7/16} " x 95 ^{1/4} "	850 x 1605 - 2230	33 ^{7/16} " x 63 ^{3/16} "-87 ^{3/16} "	3,6	7,9
Compact 1000	1 pc	1000 x 2420	39 ^{3/8} " x 95 ^{1/4} "	1000 x 1605 - 2230	39 ^{3/8} " x 63 ^{3/16} "-87 ^{3/16} "	4,0	8,8

* The height of the visible area can be chosen any value between minimum height of 1605 mm and maximum height 2230 mm.

Maximum panel thickness is 440 micron.

4 SCREEN CLASSIC

Product	Qty panels	Panel size		Visible size		Weight**	
		mm	inch	mm	inch	Kg	lbs
Classic 550	1 pc	550 x 1495	21 ^{5/8} " x 58 ^{7/8} "	550 x 1481	21 ^{5/8} " x 58 ^{5/16} "	2,2	4,8
Classic 700	1 pc	700 x 1960	27 ^{1/2} " x 77 ^{1/64} "	700 x 1946	27 ^{1/2} " x 76 ^{5/8} "	2,4	5,3
Classic 850	1 pc	850 x 2160	33 ^{7/16} " x 85"	850 x 2146	33 ^{7/16} " x 84 ^{1/2} "	2,8	6,2
Classic 1000	1 pc	1000 x 2160	39 ^{3/8} " x 85"	1000 x 2146	39 ^{3/8} " x 84 ^{1/2} "	3,0	6,6
Classic 1150	1 pc	1150 x 2160	45 ^{1/4} " x 85"	1150 x 2146	45 ^{1/4} " x 84 ^{1/2} "	4,5	9,9
Classic 1450	1 pc	1450 x 2160	57 ^{3/32} " x 85"	1450 x 2146	57 ^{3/32} " x 84 ^{1/2} "	5,0	11,0
Classic 2000	1 pc	2000 x 2160	78 ^{5/64} " x 85"	2000 x 2146	78 ^{5/64} " x 84 ^{1/2} "	3,8*	8,4*

When using 2450 mm supporting rod add 300 mm (11^{3/4}") to the panel size.

*For the Classic 2000 the weight refer to complete system without bag.

POLE SYSTEM


Product	Qty panels	Panel width		Panel size height		Weight Basic**		Weight Travel**	
		mm	inch	mm	inch	Kg	lbs	Kg	lbs
Pole 550	1 pc*	550	21 ^{5/8} "	Optional, max 2400	Optional, max 94 ^{1/2} "	1,8	3,9	2,8	6,1
Pole 700	1 pc*	700	27 ^{1/2} "	Optional, max 2400	Optional, max 94 ^{1/2} "	1,9	4,2	2,9	6,4
Pole 850	1 pc*	850	33 ^{7/16} "	Optional, max 2400	Optional, max 94 ^{1/2} "	2,0	4,4	3,0	6,6
Pole 1000	1 pc*	1000	39 ^{3/8} "	Optional, max 2400	Optional, max 94 ^{1/2} "	2,1	4,6	3,1	6,8

*Could also be used as double sided. Then complete the package with extra panel profiles.

Can handle most materials up to 450 micron thickness (paper, vinyl, pvc, textile).

Total height of the system is minimum 1000mm (39 inch) and maximum 2560mm (96 inch).

PANEL PROFILE DIMENSION SKETCH



POP UP MAGNETIC

Curved systems							
Product	Qty panels	Panel size		Total width		Total depth	
		mm	inch	mm	inch	mm	inch
1 x 3 Curved	3 pcs	673 x 2224	26 ¹ / ₂ " x 87 ¹ / ₂ "	1225	48 ⁷ / ₈ "	375	14 ³ / ₄ "
2 x 3 Curved	4 pcs	673 x 2224	26 ¹ / ₂ " x 87 ¹ / ₂ "	1915	75 ³ / ₈ "	510	20 ⁵ / ₆₄ "
3 x 3 Curved	5 pcs	673 x 2224	26 ¹ / ₂ " x 87 ¹ / ₂ "	2535	99 ³ / ₄ "	710	28"
4 x 3 Curved	6 pcs	673 x 2224	26 ¹ / ₂ " x 87 ¹ / ₂ "	3065	120 ⁵ / ₈ "	970	38 ³ / ₁₆ "
5 x 3 Curved	7 pcs	673 x 2224	26 ¹ / ₂ " x 87 ¹ / ₂ "	3600	141 ³ / ₄ "	1250	49 ⁷ / ₃₂ "

Curved system back panel	Panel size	
Product	mm	inch
Panel size all sizes	808 x 2224	31 ³ / ₄ " x 87 ¹ / ₂ "

Straight systems							
Product	Qty panels	Panel size		Total width		Total depth	
		mm	inch	mm	inch	mm	inch
1 x 3 Straight	3 pcs	733 x 2224	28 ⁷ / ₈ " x 87 ¹ / ₂ "	1283	50 ¹ / ₂ "	322	12 ⁵ / ₈ "
2 x 3 Straight	4 pcs	733 x 2224	28 ⁷ / ₈ " x 87 ¹ / ₂ "	2016	79 ³ / ₈ "	322	12 ⁵ / ₈ "
3 x 3 Straight	5 pcs	733 x 2224	28 ⁷ / ₈ " x 87 ¹ / ₂ "	2749	108 ¹ / ₄ "	322	12 ⁵ / ₈ "
4 x 3 Straight	6 pcs	733 x 2224	28 ⁷ / ₈ " x 87 ¹ / ₂ "	3482	137 ⁵ / ₆₄ "	322	12 ⁵ / ₈ "
5 x 3 Straight	7 pcs	733 x 2224	28 ⁷ / ₈ " x 87 ¹ / ₂ "	4215	166"	322	12 ⁵ / ₈ "
Front and back panels should have a maximum thickness of 350 - 550 micron. Side panels can be slightly thinner 350 - 420 micron, as they should be pliable. These panels should not have kickers. The side panels have the same dimensions as the front panel.							

Weights**	Basic		Travel		Premium		Case & Counter	
Product	Kg	lbs	Kg	lbs	Kg	lbs	Kg	lbs
Package 3x3	10,5	23,2	21,0	46,3	25,5	56,2	32	70,5
Package 4x3	12,4	27,3	22,5	49,6	28,5	62,8	34,5	76,0



POP UP TOWER

Product	Qty panels	Panel size		Diameter		Weight**	
		mm	inch	mm	inch	Kg	lbs
Tower 3 square height	3 st	673 x 2224	26 ¹ / ₂ " x 87 ¹ / ₂ "	643	25 ⁵ / ₁₆ "	5,6	12,3
Tower panel thickness should be 350 - 420 micron, as they should be pliable. These panels should not have kickers.							


SCREEN HOLDER

Product	Maximum load straight system		Maximum load curved system		Weight	
	Kg	lbs	Kg	lbs	Kg	lbs/
Screen Holder	6*	13,2	8	17,6	1,1	2,4
Screen Holder may only be used with Expolinc Pop Up Magnetic.						
* Support feet code 7365 shall be used for straight systems.						


POP UP MAGNETIC DIMENSION SKETCHES

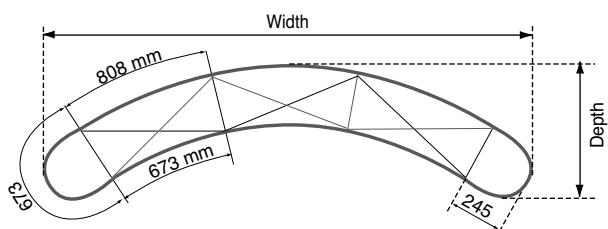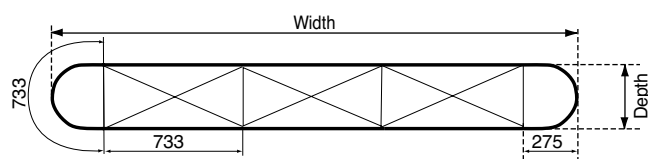

Curved systems connected to a circle

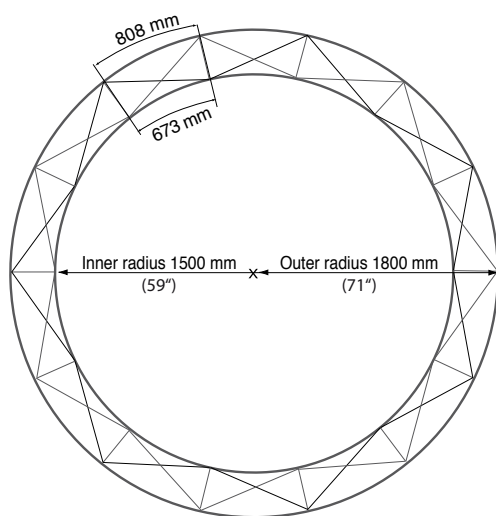


Tower




SCREEN HOLDER DIMENSION SKETCHES


Making holes in the panel for the Screen Holder

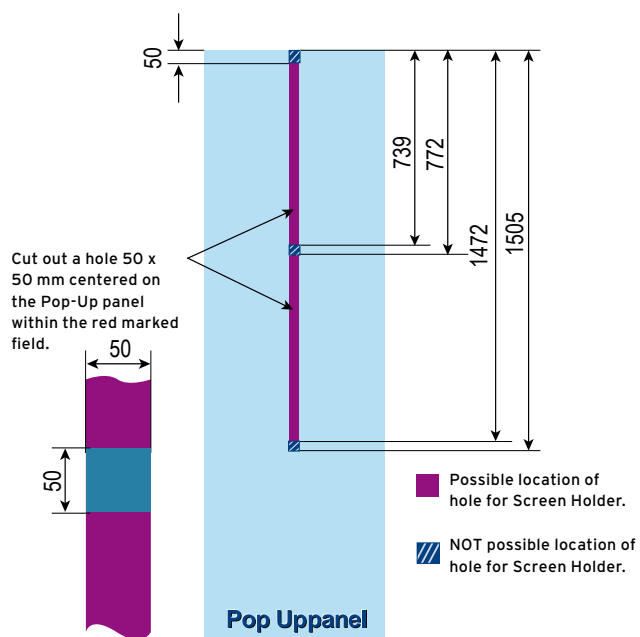


Screen plate



Suspension Options




Distance panel - Screen Holder

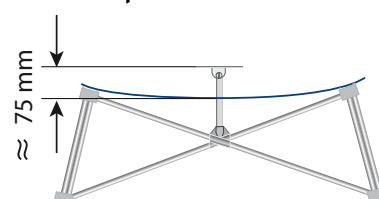

SOFT IMAGE

Product	Panel size front textile		Panel size covered sides		Weight**	
	mm	inch	mm	inch	Kg	lbs
Standard 2 x 3	1510 x 2240	59 ^{7/16} " x 88 ^{3/16} "	2150 x 2240	84 ^{1/2} " x 88 ^{3/16} "	9,7	21,4
Standard 3 x 3	2240 x 2240	88 ^{3/16} " x 88 ^{3/16} "	2880 x 2240	113 ^{3/8} " x 88 ^{3/16} "	18,0	39,7
Standard 4 x 3	2970 x 2240	116 ^{7/8} " x 88 ^{3/16} "	3610 x 2240	142 ^{1/8} " x 88 ^{3/16} "	19,5	43,0
Standard 5 x 3	3700 x 2240	145 ^{5/8} " x 88 ^{3/16} "	4340 x 2240	170 ^{7/8} " x 88 ^{3/16} "	22,0	48,5


The above measurements are the real sizes, as textile is elastic the measurements may vary.

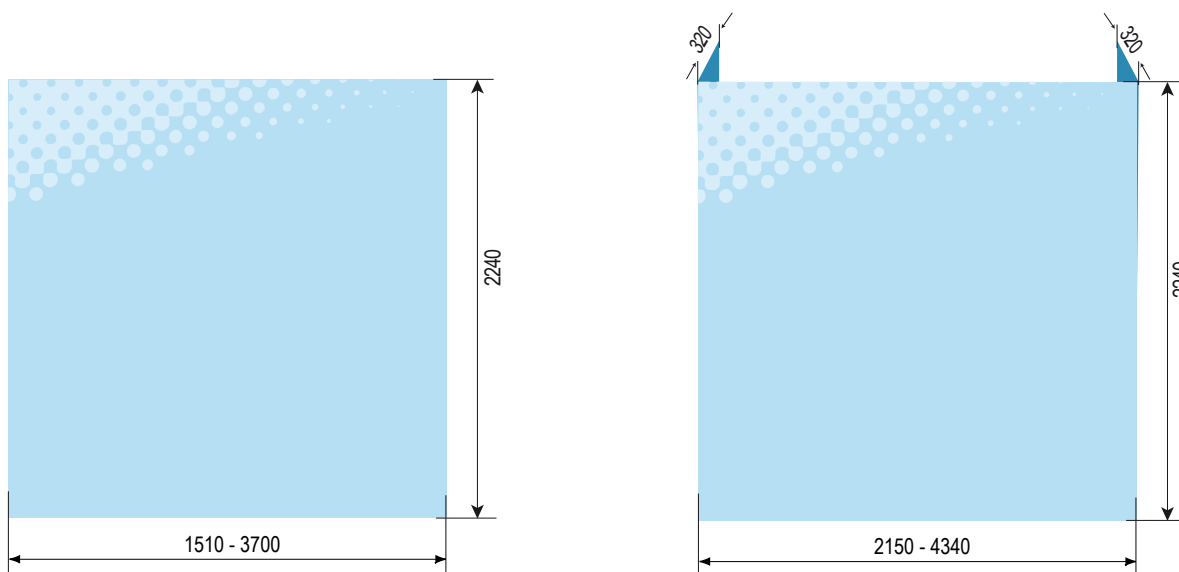

SOFT IMAGE COUNTER

Product	Panel size front textile		Panel size covered sides		Weight**	
	mm	inch	mm	inch	Kg	lbs
Soft Image Counter	1000 x 990	39 ^{3/8} " x 39"	1640 x 990	64 ^{5/8} " x 39"	12,3	27,1

The above measurements are the real sizes, as textile is elastic the measurements may vary.

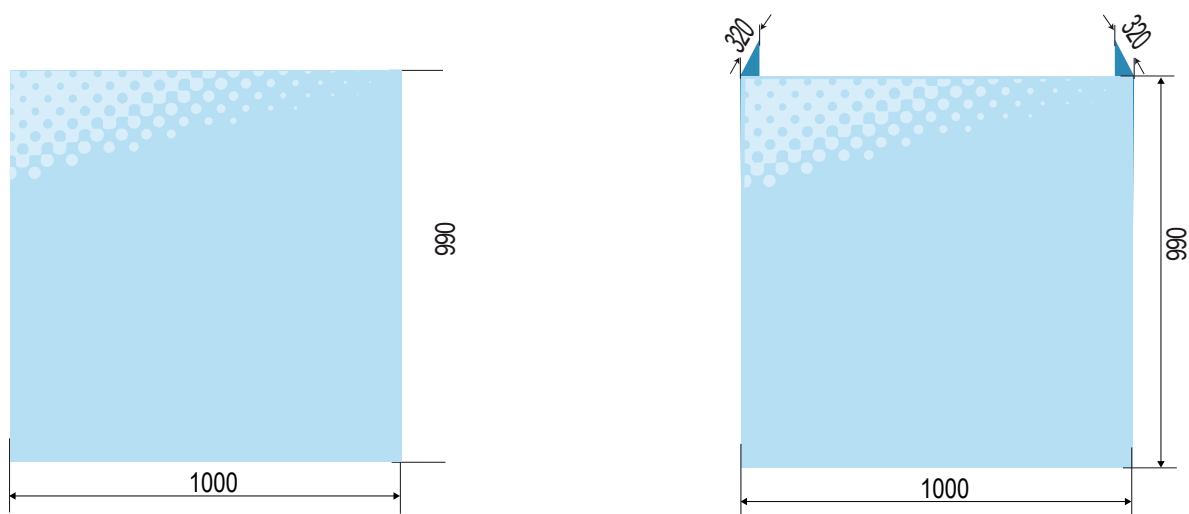

CASE & COUNTER

Product	Qty panels	Panel size		Weight**	
		mm	inch	Kg	lbs
Case & Counter	1 pc	1820 x 920	71 ^{5/8"} x 36 ^{7/32"}	22	48.5


The panel should have a maximum thickness of 350 - 420 micron.

PLASTIC BOX III


Product	Qty panels	Panel size		Weight**	
		mm	inch	Kg	lbs
Plastbox III	1 pc	1480 x 920	58 ^{1/4"} x 36 ^{7/32"}	12,8	28,2

The panel should have a maximum thickness of 350 - 420 micron.

CASE & COUNTER

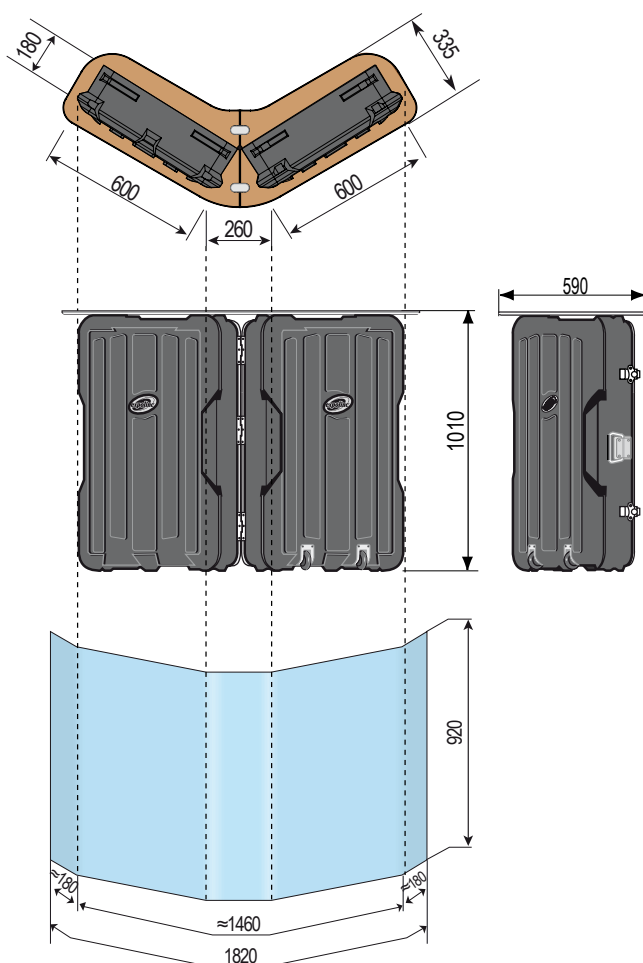

PLASTIC BOX III

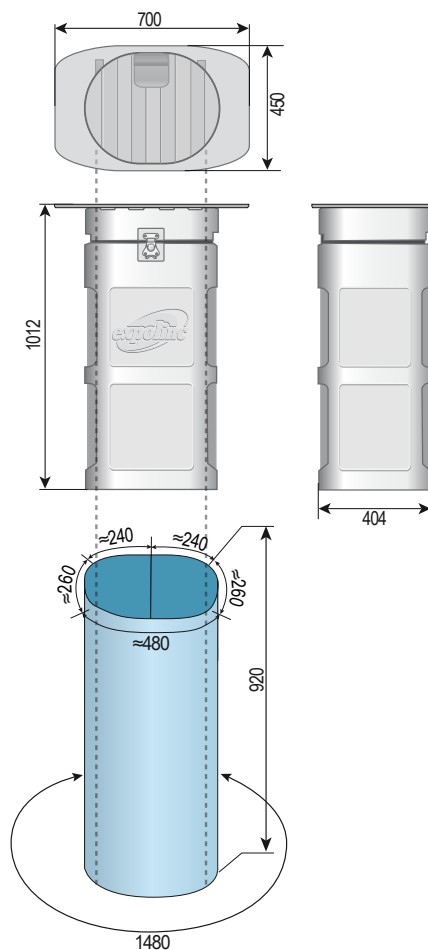


** Weights refer to complete package with bag/box without panels. Facts and figures are specified with reservation for product modification, change in assortment as well as printing errors.

STAND UP COUNTERS


Product	Qty panels		Panel size		Visible size		Weight**	
			mm	inch	mm	inch	Kg	lbs
Universal Counter	1 pc	Front	700 x 950	27 ^{1/2"} x 37 ^{3/8"}	690 x 940	27 ^{5/32"} x 38"	20	44
	4 pcs	Sides	285 x 950	11 ^{7/32"} x 37 ^{3/8"}	275 x 940	10 ^{3/4"} x 38"		
Info Counter	1 pc	Front	700 x 950	27 ^{1/2"} x 37 ^{3/8"}	690 x 940	27 ^{5/32"} x 38"	13	28,6
	2 pcs	Sides	285 x 950	11 ^{7/32"} x 37 ^{3/8"}	275 x 940	10 ^{3/4"} x 38"		

Maximum panel thickness 7 mm (1/4").
Use clips in thickness <5 mm. (3/64")

STAND UP UNIVERSAL COUNTER

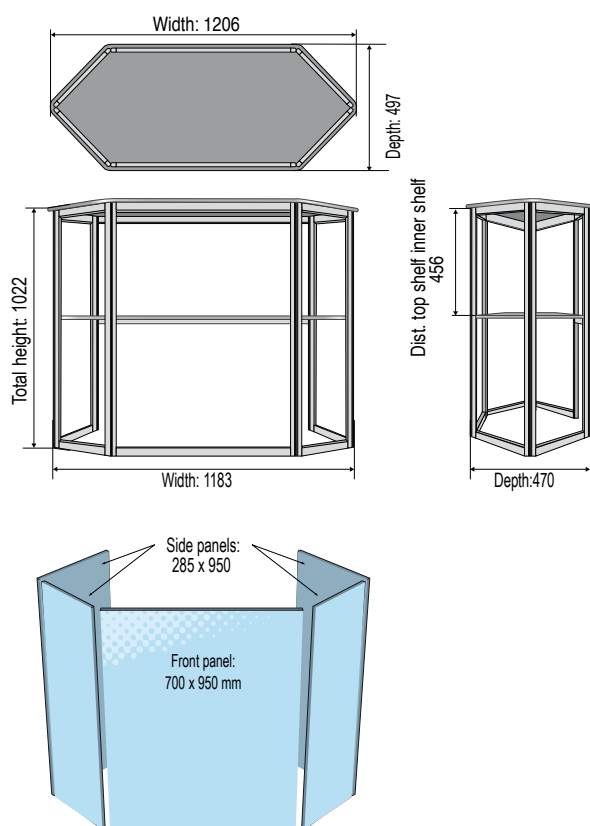


STAND UP INFO COUNTER

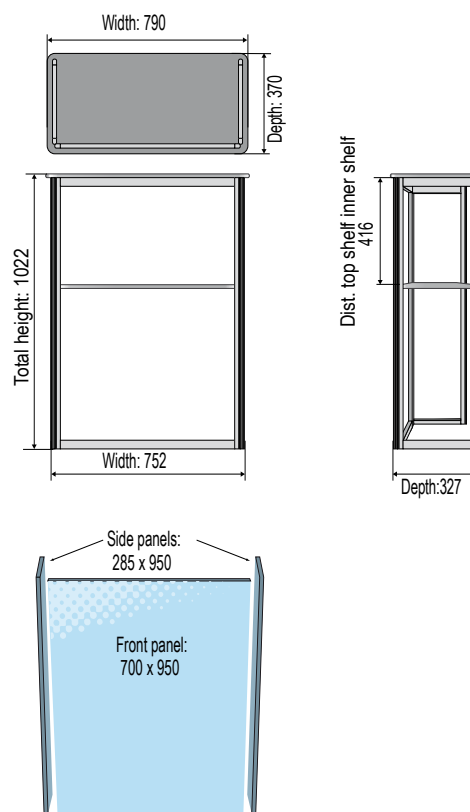

PANEL BASE

Product	Qty panels	Max Panel thickness		Weight**	
		mm	inch	Kg	lbs
80 (pair)	1 pc	18,5	3/4"	0,8	1,8
400	1 pc	18,5	3/4"	1,9	4,2
610	1 pc	18,5	3/4"	2,8	6,1


Can handle most materials up to 18,5 mm (3/4 inch) thickness. Recommended maximum panel height approx 1800mm depending on the material.
Note that 50 mm (1 inch) at the bottom becomes invisible in the system L-extrusion.

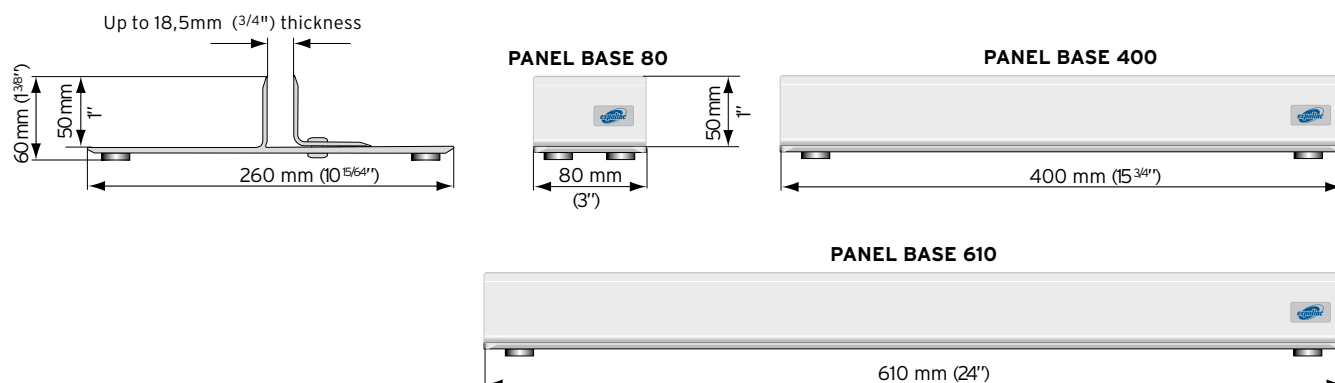

MAGNET FRAME

Product	Qty panels	Frame Dimensions		Panel size		Weight**	
		mm	inch	mm	inch	Kg	lbs
400 x 1600	2 pcs	405 x 1590	16" x 62 ⁵ / ₈ "	400 x 1535	15 ³ / ₄ " x 60 ⁷ / ₁₆ "	2,3	5,0
400 x 1800	2 pcs	405 x 1790	16" x 70 ¹ / ₂ "	400 x 1735	15 ³ / ₄ " x 68 ⁵ / ₁₆ "	2,5	5,5
610 x 1600	2 pcs	615 x 1590	24 ⁷ / ₃₂ " x 62 ⁵ / ₈ "	610 x 1535	24" x 60 ⁷ / ₁₆ "	2,5	5,5
610 x 1800	2 pcs	615 x 1790	24 ⁷ / ₃₂ " x 70 ¹ / ₂ "	610 x 1735	24" x 68 ⁵ / ₁₆ "	2,7	5,9

The panel should have a maximum thickness of 350 - 420 micron.

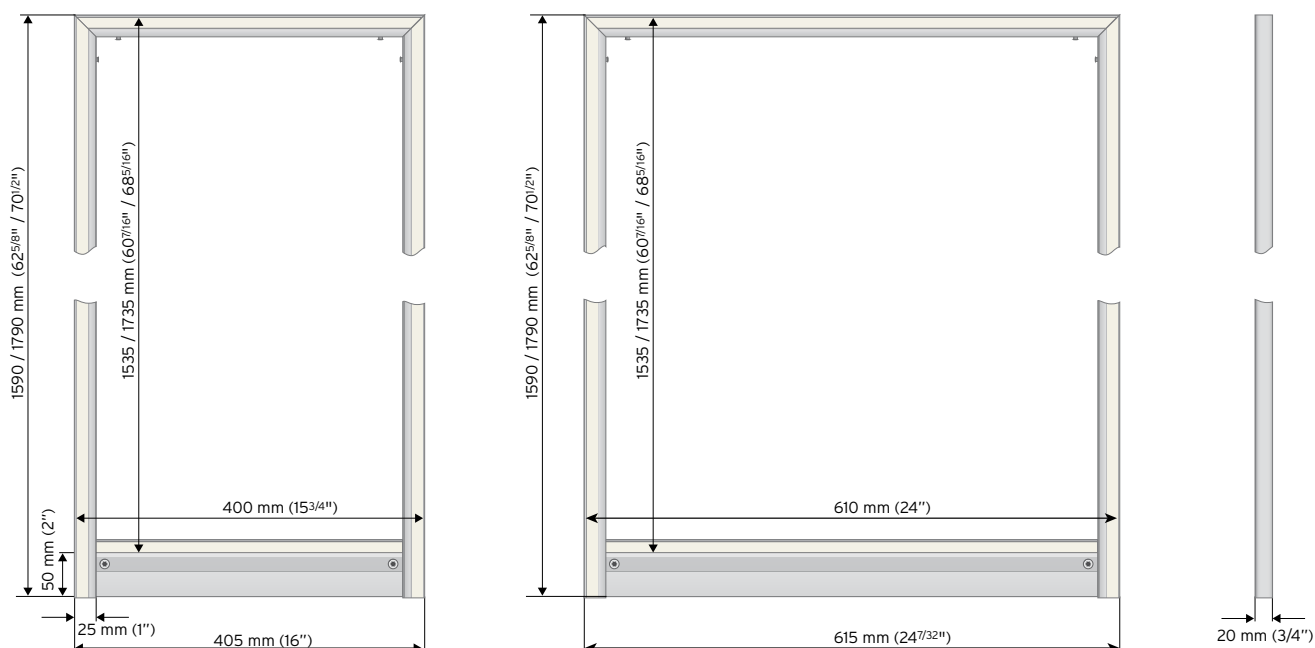

** Weights refer to complete package with bag/box without panels. Facts and figures are specified with reservation for product modification, change in assortment as well as printing errors.

FLAG SYSTEM


Model	Qty panels	Total fabric size		Visible size	
		mm	inch	mm	inch
Curved	1 pc	1060 x 3700	42 ¹ / ₈ " x 148 ³ / ₆₄ "	1000 x 3700	39 ³ / ₈ " x 145 ¹ / ₁₆ "
Rektangular	1 pc	1060 x 2670	42 ¹ / ₈ " x 105 ¹ / ₆₄ "	1000 x 2650	39 ³ / ₈ " x 104 ¹ / ₃₂ "
Rektangular with extra pole section.	1 pc	1060 x 3670	42 ¹ / ₈ " x 144 ³ / ₆₄ "	1000 x 3650	39 ³ / ₈ " x 143 ¹ / ₁₆ "

Specified height measurement refers to the maximum height measurement of the flag.

At wind >6 m/s (13.4 mph) we recommend extra weight.


Weights	System with X-foot		System with ground stake	
Product	Kg	lbs	Kg	lbs
Standard Flag System incl bag	10,0	22,0	3,0	6,6

Add fabric (70-80 mm 2³/₄ - 3") in addition to the image area to sew a 60 mm wide (2³/₈") pocket together with the extra separate fabric part for the flag pole.

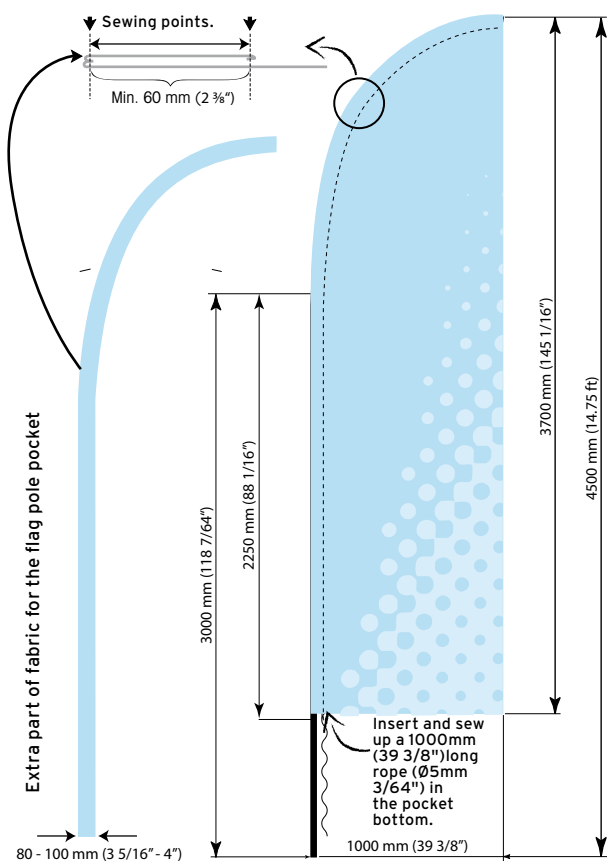

Add fabric in addition to the image area to sew two pockets.

- 70-80 mm to the 60 mm (2³/₈") wide pocket for the flag pole
- 30 - 40 mm to the 20 mm (3/4") wide pocket for the horizontal fibre glass pole.

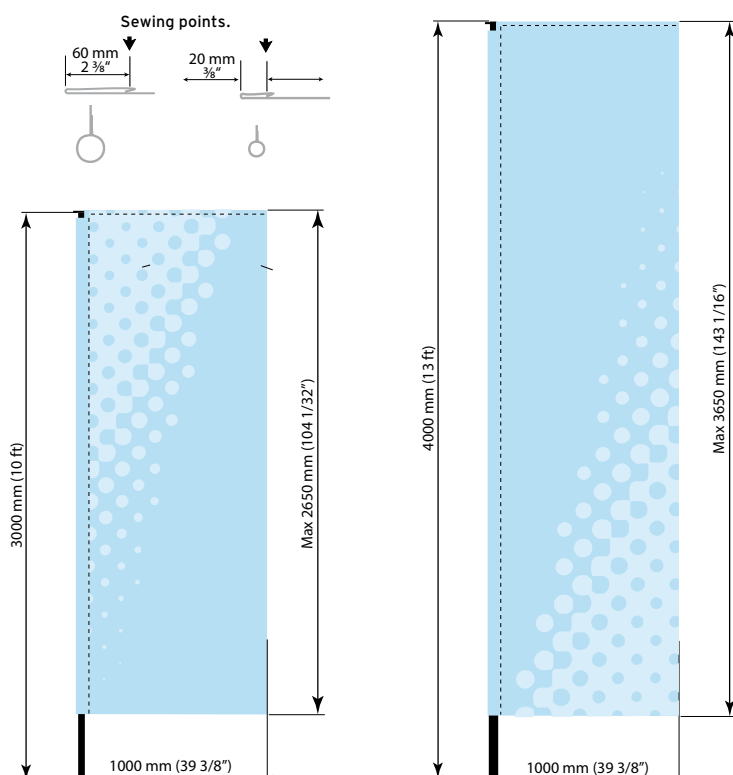

BROCHURE STAND

Product	Qty pockets	Size of holder		Weight**	
		mm	inch	Kg	lbs
4500 with soft bag	4 pcs A4	220 x 330	8 ³ / ₈ " x 13"	5,6	12,4
4501 with hard case	4 pcs A4	220 x 330	8 ³ / ₈ " x 13"	9,3	20,5

BROCHURE STAND DOUBLE

Product	Qty pockets	Size of holder		Weight**	
		mm	inch	Kg	lbs
2100 with soft bag	5 pcs A4	220 x 330	8 ³ / ₈ " x 13"	5,5	12,1
2101 with hard case	5 pcs A4	220 x 330	8 ³ / ₈ " x 13"	9,0	19,8

4 BROCHURE

Product	Qty pockets	Size of holder		Weight**	
		mm	inch	Kg	lbs
4250 4 Brochure	4 pc fabric holder. Max 75 sheets/holder	260 x 260	10 ¹ / ₄ " x 10 ¹ / ₄ "	2,1	4,6
4255 4 Brochure	8 pc fabric holder. Max 75 sheets/holder	260 x 260	10 ¹ / ₄ " x 10 ¹ / ₄ "	2,4	5,3

GRAPHIC PROFILE

Product	Maximum thickness		Maximum load		Weight**	
	mikron	mil	Kg/m	lbs/foot	Kg/m	lbs/foot
18 mm	1000	40	1	0,67	0,1	0,07

